



NING BO YUANFENG FIRE CONTROL EQUIPMENT CO.,LTD

Add:50meters from Zhengxiang Gas Station,Ditang District,
Yuyao City Zhejiang province, China

Tel:86-574-62295288 62291655

Fax:86-574-62293678

P.C:315492

E-mail:nell@nbyuanfeng.com

Http://www.nbyuanfeng.com

MSN:nbnell@hotmail.com

Skype:nell-chu





Ningbo Yuanfeng Fire Control Equipment Co.,Ltd. Was established in 1995 years. Our company is located in Yuyao city which has 7000 years long history of Hemudu Culture, and it is only 50 kilometers far from the Ningbo and Shanghai port.

Our company occupies an area of more than 7800 square meters for the building. Presently, there are more than 180 employees working in the company, and possesses the state-advances production lines for the hydraulic pressure, pressing pressure and spraying printing appliances etc. Our company specializes in the research, development, manufacture and sale of fire fighting equipment.


After a long and unremitting effort, the company has established a set of strict quality inspection system and management system. The products are sold all over the country and also exported to those areas of southeast Asia, Europe, Unites States, etc. which helped the company gainer a wide recognition from its customer.

Our company has passed the ISO9000-2008 products quality authorization system. In the future, in order meet the demands of the customers and the markets our company will insist on developing its new products depending on scientific innovations, and at the same time, try the best to enhance the product quality and contribute to the fire control cause.

We sincerely welcome customers from all over the world come and visit out company.



DRY CHEMICAL POWDER FIRE EXTINGUISHER

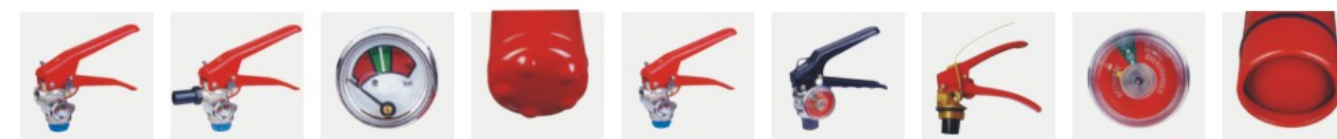

Product Specification:

Model No.	YF10-DP001	YF10-DP002	YF10-DP003	YF10-DP004	YF10-DP005	YF10-DP006
Capacity(Kg)	1kg	2kg	4kg	6kg	9kg	12kg
Cylinder Diamater(mm)	φ85	φ110	φ140	φ162	φ182	φ190
Fire Rating	5A/34B	13A/74B	21A/113B	34A/183B	43A/233B	55A/233B
Working Pressure(Bar)	14	14	14	14	14	14
Test Pressure(Bar)	27	27	27	27	27	27
Range Of Discharge(m)	≥3	≥3	≥3	≥5	≥8	≥8
Duration Of Discharge(s)	≥6	≥9	≥13	≥15	≥15	≥20
Operation Temperature	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃

Model No.	YF10-DP007	YF10-DP008	YF10-DP009	YF10-DP010	YF10-DP011	YF10-DP012	YF10-DP013	YF10-DP014	YF10-DP015
Capacity(Kg)	1kg	2kg	3kg	4kg	5kg	6kg	8kg	9kg	12kg
Cylinder Diamater(mm)	φ90	φ110	φ130	φ130	φ145	φ160	φ160	φ175	φ182
Fire Rating	5A/34B	13A/74B	13A/89B	21A/113B	21A/140B	34A/183B	34A/210B	43A/233B	55A/233B
Working Pressure(Bar)	14	14	14	14	14	14	14	14	14
Test Pressure(Bar)	27	27	27	27	27	27	27	27	27
Range Of Discharge(m)	≥3	≥3	≥3	≥3	≥4	≥5	≥6	≥6	≥6
Duration Of Discharge(s)	≥6	≥9	≥10	≥13	≥14	≥15	≥15	≥16	≥20
Operation Temperature	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃	-30℃~+60℃



MOBILE TROLLEY FIRE EXTINGUISHERS



Technical Specification

Extinguisher Type	Dry Chemical Powder Trolley					
Model Number	YF10-TD25	YF10-TD30	YF10-TD50	YF10-TD50A	YF10-TD75	YF10-TD100
Capacity(Kg)	25	30	50	50	75	100
Cylinder Diameter(mm)	φ300	φ300	φ300	φ300	φ360	φ407
Discharge Time(s)	30	35	45	45	55	65
Fire Rating	A IIB C	A IIB C	A IVB C	A IIIB C	A IVB C	A IVB C
Extinguisher Weight(Kg)	58	63	91	91	128	160
Packing Size (LXWXH)(mm)2pcs	475x430x965	475x430x965	515x430x100	515x430x1100	600x500x1150	1200x600x1500
Working Pressure	15bar					
Test Pressure	30bar					
Operation Temperature	-30℃~+60℃					

INSIDE GAS CARTRIDGE OPERATED MOBILE TROLLEY FIRE EXTINGUISHERS



Technical Specification

Extinguisher Type	Dry Chemical Powder Trolley					
Model Number	YF10-CTD50	YF10-CTD50A	YF10-CTD100	YF10-CFD45	YF10-CFD90	YF10-CFD135
Capacity(Kg.L)	50	50	100	45	90	135
Cylinder Diameter(mm)	φ300	φ300	φ407	φ300	φ407	φ407
Discharge Time(s)	45	45	65	50	90	120
Fire Rating	A IVB C	A IIIB C	A IVB C	A IIIB	A IVB	A IVB
Extinguisher Weight(Kg)	95		158	96	152	215
Test Pressure	30bar			30bar		
Operation Temperature	-30℃~+60℃			+5℃~60℃		

CO₂ FIRE EXTINGUISHERS



Technical Specification

	SIZE	SIZE & NET WEIGHT OF CYLINDER(CK45)		WORKING PRESSURE	TESTING PRESSURE	PACKING QTY	CARTON DIMENSIONS	GROSS WEIGHT
Model No.	KGS	MM/PC	KGS/PC	BAR	BAR	PCS/CTN	MM/CTN	KGS/CTN
YF10-CO001	1.30	108x315x1.00	3.90	174	250	1	160x130x450	5.90
YF10-CO002	2	108x440x1.00	5.10	174	250	1	160x130x570	8.10
		114x415x1.00	5.10	174	250	1	180x140x550	8.10
YF10-CO003	2.30	114x470x1.20	5.70	174	250	1	180x140x600	9.80
YF10-CO004	3	140x423x1.20	7.20	174	250	1	180x160x550	11.20
YF10-CO005	3.50	140x477x1.20	8.30	174	250	1	180x160x600	13.80
YF10-CO006	4	140x531x1.20	8.80	174	250	1	210x160x660	14.80
YF10-CO007	4.50	140x585x1.20	9.80	174	250	1	210x160x710	16.30
YF10-CO008	5	140x640x1.20	10.50	174	250	1	210x160x770	17.70
		152x560x1.20	11.70	174	250	1	210x170x700	18.70
YF10-CO009	6	152x655x1.20	13.50	174	250	1	210x170x790	21.40
YF10-CO010	7	152x760x1.50	15.20	174	250	1	210x170x890	24.20
YF10-CO011	10	152x1030x1.50	20.50	174	250	1	210x170x1130	33.70

WATER & FOAM FIRE EXTINGUISHER



Technical Specification

Extinguisher Type	Foam Fire Extinguisher					Wet Chemical Ext	
Model Number	YF10-FS001	YF10-FS002	YF10-FS003	YF10-FS004	YF10-FS005	YF10-WFS001	YF10-WFS002
Capacity(L)	2	6		9	9	2	6
Cylinder Diameter(mm)	φ110	φ160	φ160	φ180	φ180	110	160
Discharge Time(s)	18	24	24	35	34.5	25	88
Fire Rating	5A/55B	21A/144B	21A/183B	27A/183B	27A/233B	8A/25F	13A/75F
Extinguisher Weight(kg)	3.52	8.85		12.40		3.84	9.65
Working Pressure	14bar					7bar	
Test Pressure	27bar						
Operation Temperature	5℃~+60℃						



YF10-WV001



YF10-WV002



YF10-WV003



YF10-WV004



YF10-WV017



YF10-WV018



YF10-WV019



YF10-WV020



YF10-WV005



YF10-WV006



YF10-WV007



YF10-WV008



YF10-WV021



YF10-WV022



YF10-WV023



YF10-WV024



YF10-WV009



YF10-WV010



YF10-WV011



YF10-WV012



YF10-WV025



YF10-WV026



YF10-WV027



YF10-WV028



YF10-WV013



YF10-WV014



YF10-WV015



YF10-WV016



YF10-WV029



YF10-WV030



YF10-WV031



YF10-WV032

POWDER FIRE EXTINGUISHER WITH GAS CARTRIDGE



MODEL NO .	QUANTITY POWDER	DISCHARGE RANGE	DISCHARGE TIME	HOSE LENGTH	TATOL WEIGHT
YF10-GSP001	12kg	5-8M	30s	700mm	21kg
YF10-GSP002	9kg	5-8M	25s	550mm	17kg
YF10-GSP003	6kg	5-8M	17s	450mm	13kg

AUTOMATIC DRY POWDER FIRE EXTINGUISHERS



Model No.	YF10-HP01	YF10-HP02	YF10-HP03	YF10-HP04	YF10-HP05	YF10-HP06
Capacity(Kg)	6	6	6	9	12	12
Cylinder Diamater(mm)	270	213	160	300	300	300
Cylinder Height (mm)	205	428	440	245	275	398
Capacity(L)	7.58	8.34	7.2	11.57	13.22	14.16
Working Pressure (Bar)	14	14	14	14	14	14
Test Pressure (Bar)	27	27	27	27	27	27
Temperature Range (°C)	-30°C~+60°C					

FIRE EXTINGUISHER CYLINDERS FOR DRY POWDER, FOAM & WATER



Code	YF10-CY001	YF10-CY002	YF10-CY003	YF10-CY004	YF10-CY005	YF10-CY006	YF10-CY007	YF10-CY008	YF10-CY009
Capacity(Kg)	1kg	2kg	3kg	4kg	5kg	6kg	8kg	9kg	12kg
Cylinder Diamater(mm)	φ85/φ90	φ110	φ130	φ160	φ160	φ175	φ175	φ175	φ175



YF10-HR001



YF10-HR002



YF10-HR003



YF10-HR004



YF10-HR005



YF10-HR006



YF10-HR007



A
650(mm)



B
600(mm)



C
550(mm)



D
500(mm)



E
480(mm)



F
360(mm)



G
595(mm)

AUTO FIRE EXTINGUISHER



Type	Out-diameter(mm)	Powder Weight	Working Pressure(Bar)	Test Pressure(Bar)	Range Of Discharge(m)	Duration of Discharge(s)	Fire Extinguisher Agent
A	φ60	400G	8	12	≥3	≥8	ABC/BC/AFFF/WATER
B	φ66	500G	8	12	≥3	≥8	ABC/BC/AFFF/WATER

FIRE BLANKET




SIZE: 1.0x1.0m, 1.0x1.2m, 1.0x1.5m, 1.0x1.8m, 1.2x1.0m, 1.0x1.2m, 1.2x1.5m,
1.2x1.8m, 1.5x1.5m, 1.8x1.5m, 1.8x1.8m

PACKING: PVC Box, PVC Cylinder, Nylon Soft Bag, PVC Soft Bag.

PRESSURE GAUGE



YF10-PG001



YF10-PG002



YF10-PG003



YF10-PG004




YF10-PG005



YF10-PG006




YF10-PG007



YF10-PG008



YF10-PG009



YF10-PG010



YF10-PG011




YF10-PG012




YF10-PG013



YF10-PG014



YF10-PG015



YF10-PG016



YF10-WV065



YF10-WV066



YF10-WV067



YF10-WV068



YF10-VV001



YF10-VV002



YF10-VV003



YF10-VV004



YF10-WV069



YF10-WV070



YF10-WV071



YF10-WV072



YF10-VV005



YF10-VV006



YF10-VV007



YF10-VV008



YF10-WV073



YF10-WV074



YF10-WV075



YF10-WV076



YF10-VV009



YF10-VV010



YF10-VV011



YF10-VV012



YF10-WV077



YF10-WV078



YF10-WV079



YF10-WV080



YF10-VV013



YF10-VV014



YF10-VV015



YF10-VV016



YF10-WV033



YF10-WV034



YF10-WV035



YF10-WV036



YF10-WV049



YF10-WV050




YF10-WV051



YF10-WV052



YF10-WV037



YF10-WV038



YF10-WV039



YF10-WV040



YF10-WV053



YF10-WV054



YF10-WV055



YF10-WV056



YF10-WV041



YF10-WV042



YF10-WV043



YF10-WV044



YF10-WV057



YF10-WV058



YF10-WV059



YF10-WV060



YF10-WV045



YF10-WV046



YF10-WV047



YF10-WV48



YF10-WV061



YF10-WV062



YF10-WV063



YF10-WV064



YF10-SH024

Thread:
A:M24X1.5
B:M30X1.5
C:M45X1.5
D:M74X2
E:G2



A




B



C



D



E



F



G



H



I

YF10-SH025




YF10-SH026



YF10-SH027



YF10-SH028

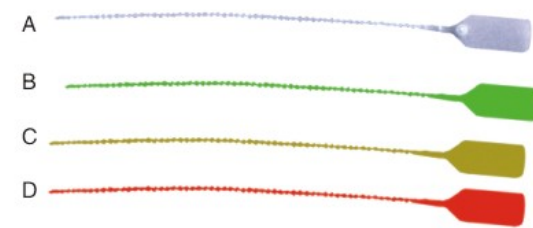

YF10-SH029



YF10-S001



YF10-S002



YF10-S003



YF10-S004



YF10-S005



YF10-S006



YF10-S007



YF10-S008



YF10-S009



YF10-S010



YF10-S011



YF10-S012



YF10-S013



YF10-S014



YF10-S015



YF10-S016



YF10-S017



YF10-S018



YF10-T001



YF10-T002



YF10-T003



YF10-T004



YF10-T005



YF10-T006



YF10-T007



YF10-T008



YF10-T009



YF10-T010



YF10-T011

FIRE HOSES



YF10-FH001



YF10-FH002



YF10-FH003



YF10-FH004



YF10-FH005



YF10-FH006



YF10-FH007



YF10-FH008



YF10-FH011



YF10-FH009



YF10-FH010



A



B



C



D



E



F



G



H



I



J



K



L



M



N




O



P



Q



R



S



T



YF10-VV017



YF10-VV018



YF10-VV019



YF10-VV020



YF10-VV033



YF10-VV034



YF10-VV035



YF10-VV036



YF10-VV021



YF10-VV022



YF10-VV023



YF10-VV024



YF10-VV037



YF10-VV038



YF10-VV039



YF10-VV040



YF10-VV025



YF10-VV026



YF10-VV027



YF10-VV028



YF10-VV041



YF10-VV042



YF10-VV043



YF10-VV044



YF10-VV029



YF10-VV030



YF10-VV031



YF10-VV032



YF10-VV045





YF10-VV046



YF10-VV047



YF10-VV048

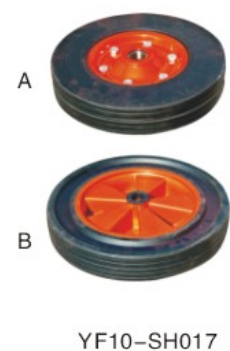


YF10-SH018



YF10-SH020



YF10-SH022



YF10-SH022



YF10-SH023

